



Advanced XRF equipment and solutions

A WHOLE LAB IN ONE HAND.
EVERYWHERE AND ANYTIME.

ProSpector 2



ProSpector 2 is our time-tested handheld XRF analyzer.

Due to the advanced electronics and state-of-the-art mathematical algorithms, ProSpector 2 provides ultimate quality of measurement within a couple of seconds. It is an intuitive and user-friendly instrument for highly accurate elemental analysis in a variety of applications

ACCURACY

With powerful hardware and unique software algorithms, the ProSpector 2 offers the highest precision and accuracy of elemental analysis for a wide range of materials

SPEED

Dynamically Adaptive Shaping (DAS) DPP developed by Elvatech combined with the Fast SDD detector makes the ProSpector 2 the fastest handheld XRF analyzer on the market

STABILITY

Thanks to the digiX-40 digital X-Ray source, automatic temperature and barometric corrections, and digital calibration adjustment, ProSpector 2 offers long-life reproducibility of the analysis without the need to re-calibrate the system




Shock and water resistant carrying case allows you to take the instrument anywhere you need it.

A holster with belt straps is used to keep the instrument handy all the time.

- ✓ High speed of operation @ above 500 000 CPS count rate
- ✓ Ambient temperature and pressure corrections for highest stability
- ✓ Over 10 hours operation from the battery
- ✓ Detector protection
- ✓ Extensive and editable alloy grade library
- ✓ Protective film replacement with no tool required
- ✓ Full compatibility with ElvaXTM PC software
- ✓ Radiation safety: IR proximity sensor and low count detection

Instant Analysis Results Print-out with a portable Bluetooth printer provides measurement prints at any time, anywhere

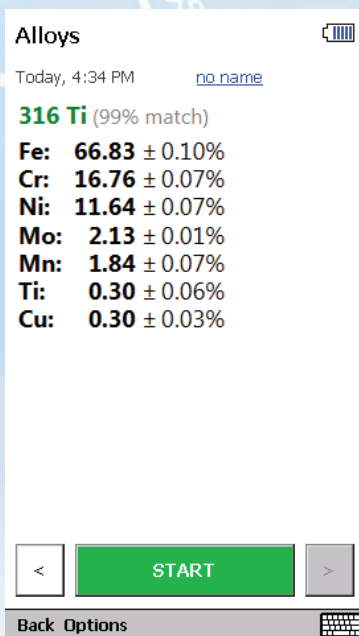

ProSpector 2 is a powerful handheld XRF analyzer, designed by Elvatech. Due to the advanced hardware and unique software algorithms, ProSpector 2 provides ultimate speed and accuracy of the elemental analysis. ProSpector 2 combines powerful analytical software toolkit with an easy-to-use interface, allowing even novice operators to perform any necessary measurements in seconds.

Digital X-Ray Source digiX

Anode: Rh, W

Voltage: 45 kV

Current: 200 uAmp

Power: 2 W

5 positions filter changer

X-Ray Detector

Type: Fast SDD (optional PIN)

Area: 25 mm²

Energy resolution: <140 eV @ 5.9 keV

Count rate: 500,000 cps

Electronics

DPP: proprietary DAS (Dynamically Adaptive Shaping) type,
80 MHz sampling rate

MCA: 4096 channels

Display: 4.3"

Connectivity: USB, Bluetooth

High resolution video camera (option)

General

Dimensions: 242 x 230 x 78 mm

Weight: 1.4 kg

Software

Operating system: Windows EC7

Analysis algorithms: Fundamental parameters (FPA),
Empirical (regression) calibrations

Elvatech Ltd.

50 Mashynobudivna str.,

Kyiv 03680, Ukraine

Phone: +38 (044) 599-11-43

Fax: +38 (044) 406-65-83

E-mail: office@elvatech.com

www.elvatech.com